FIG. 1

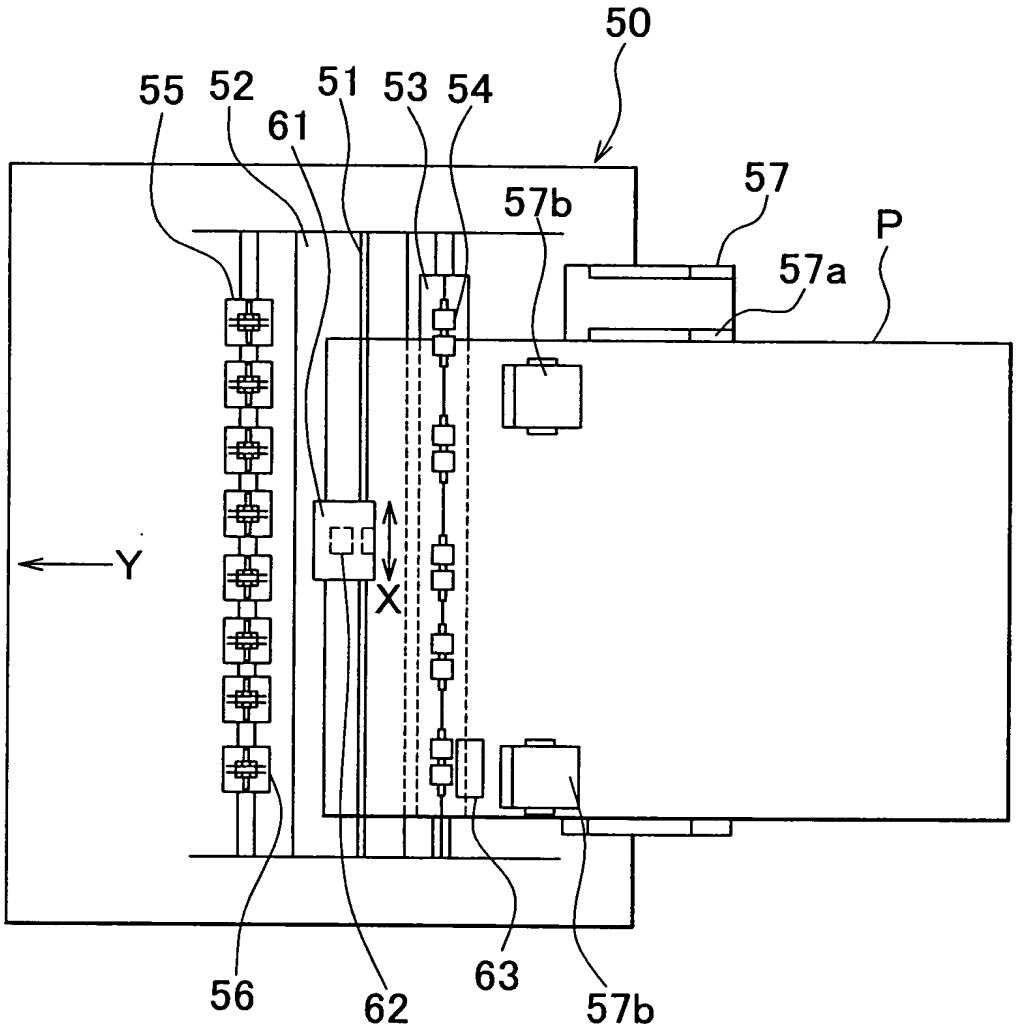

FIG. 2

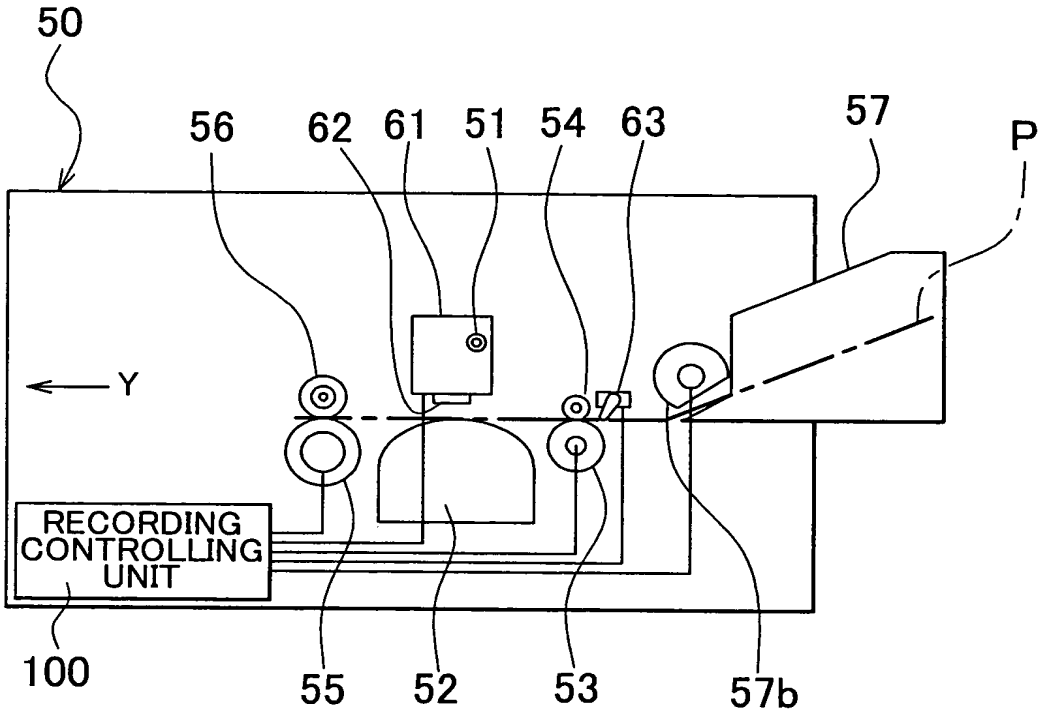

FIG. 3

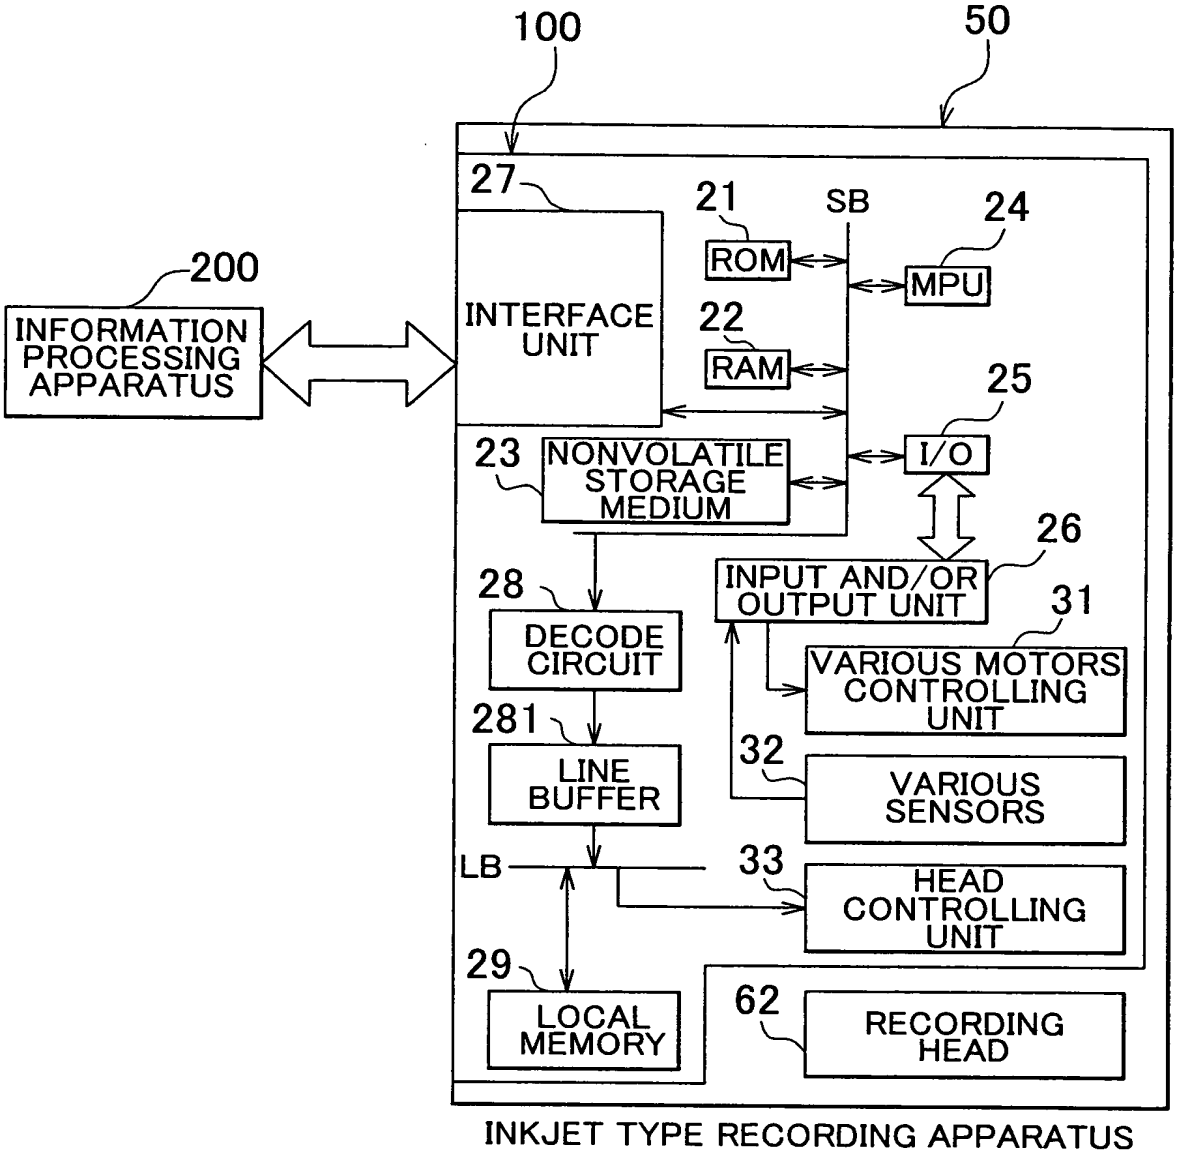

INKJET TYPE RECORDING APPARATUS

FIG. 4

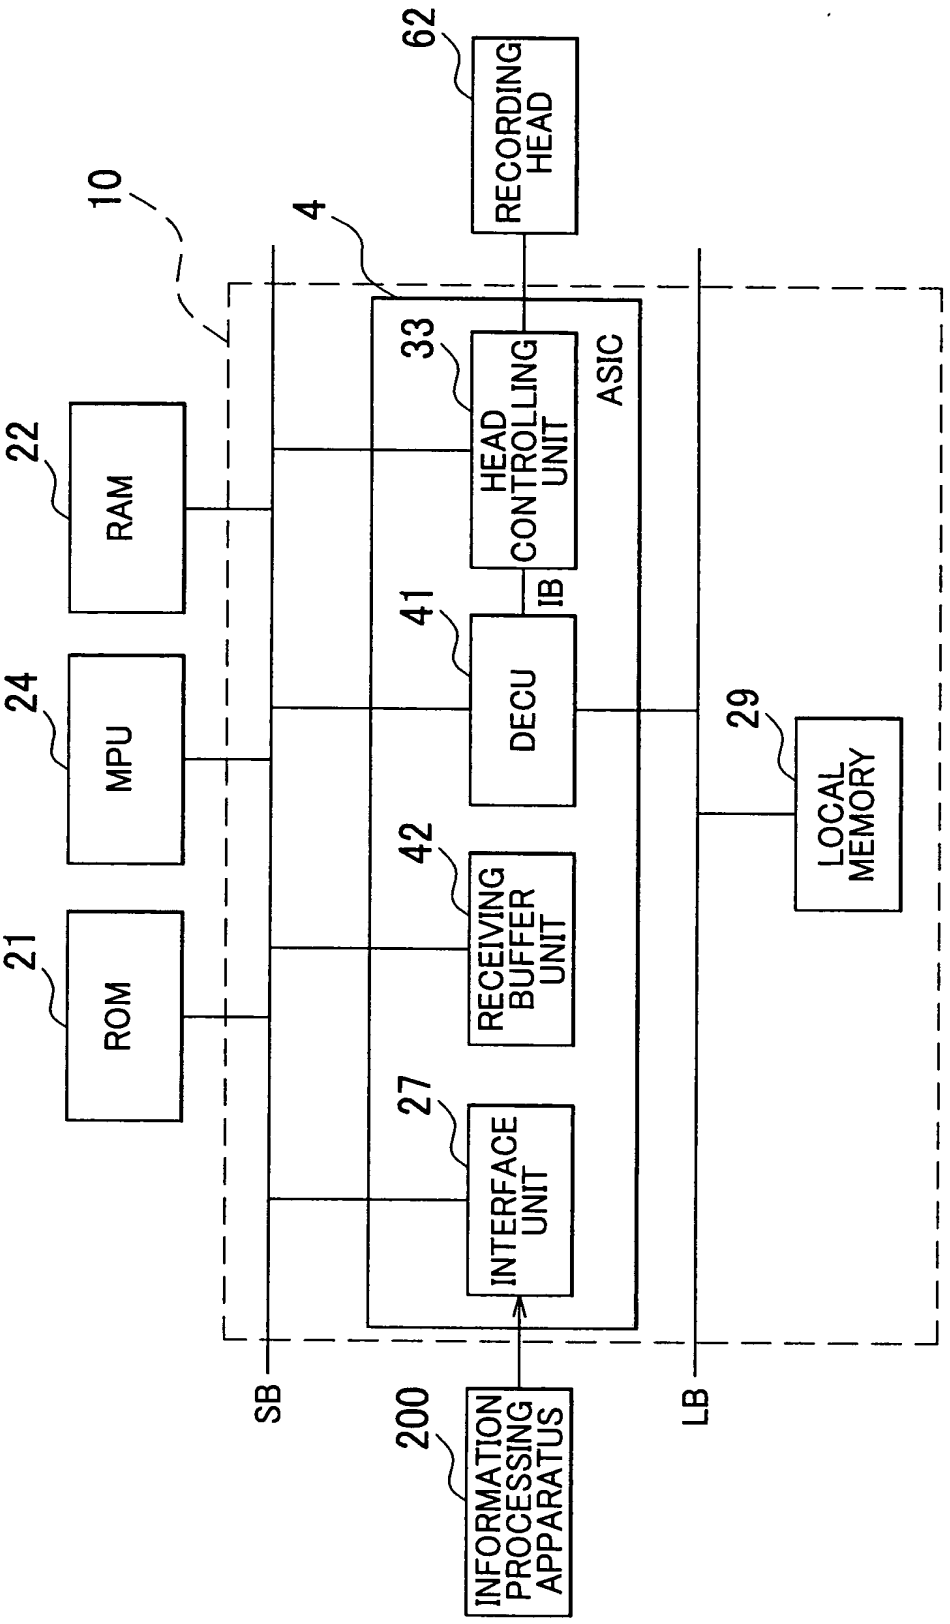

FIG. 5

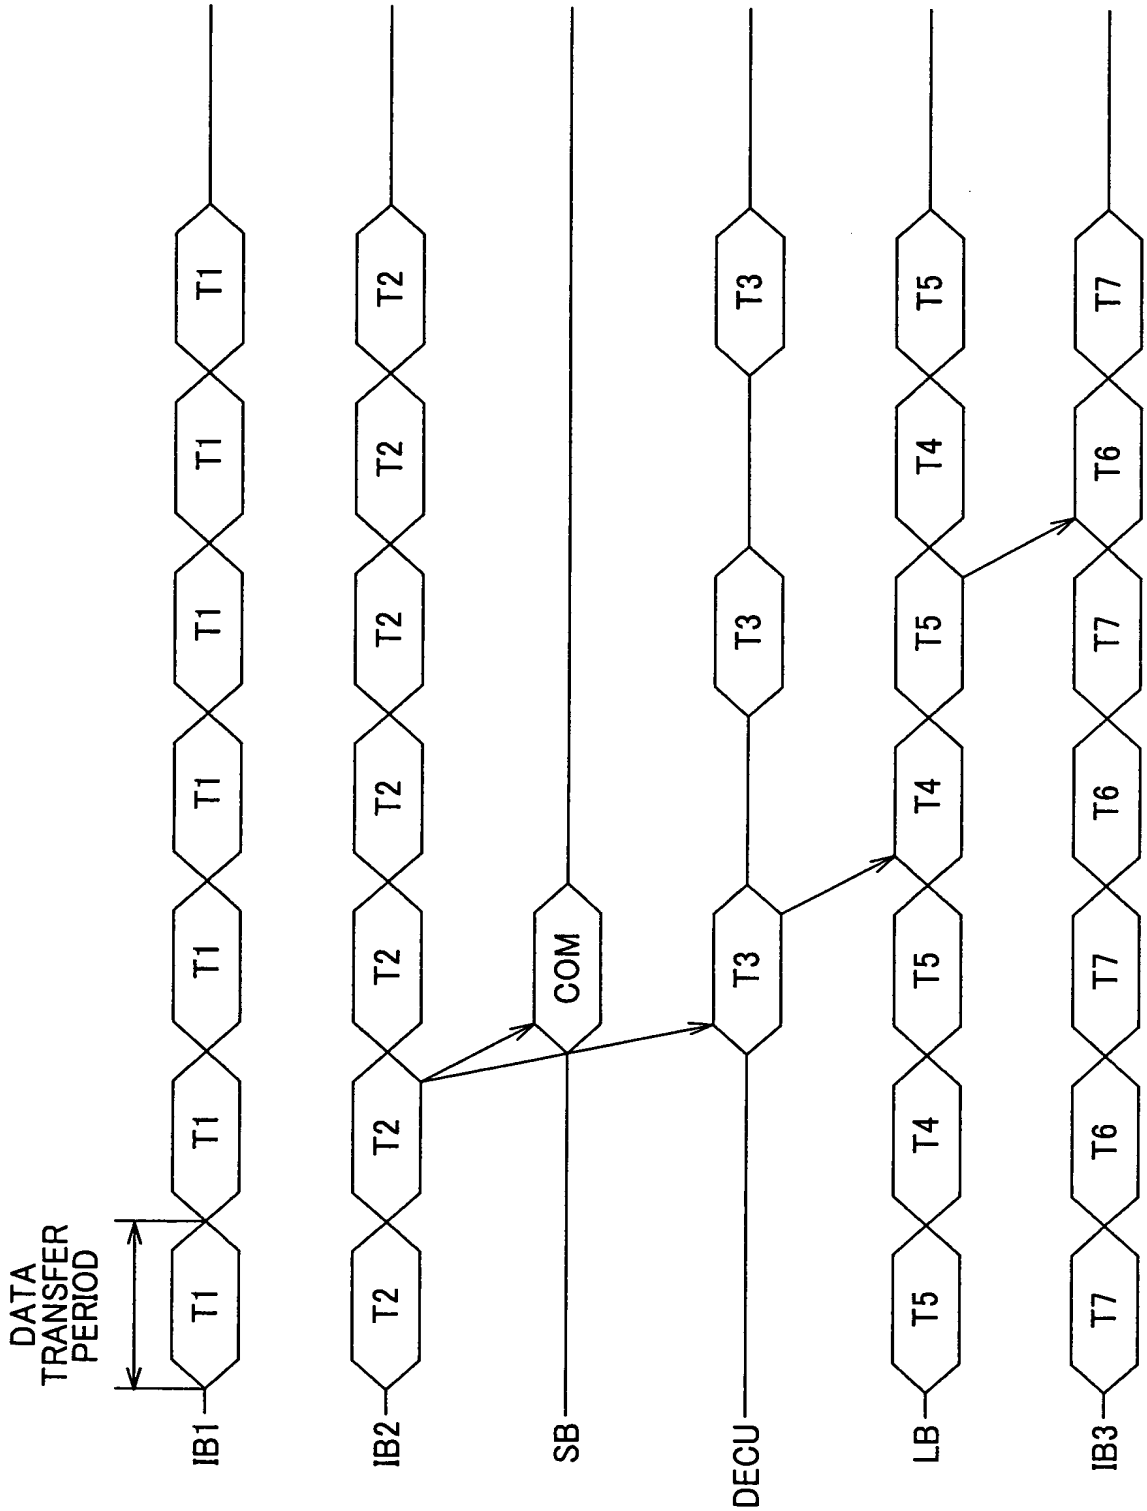

FIG. 6

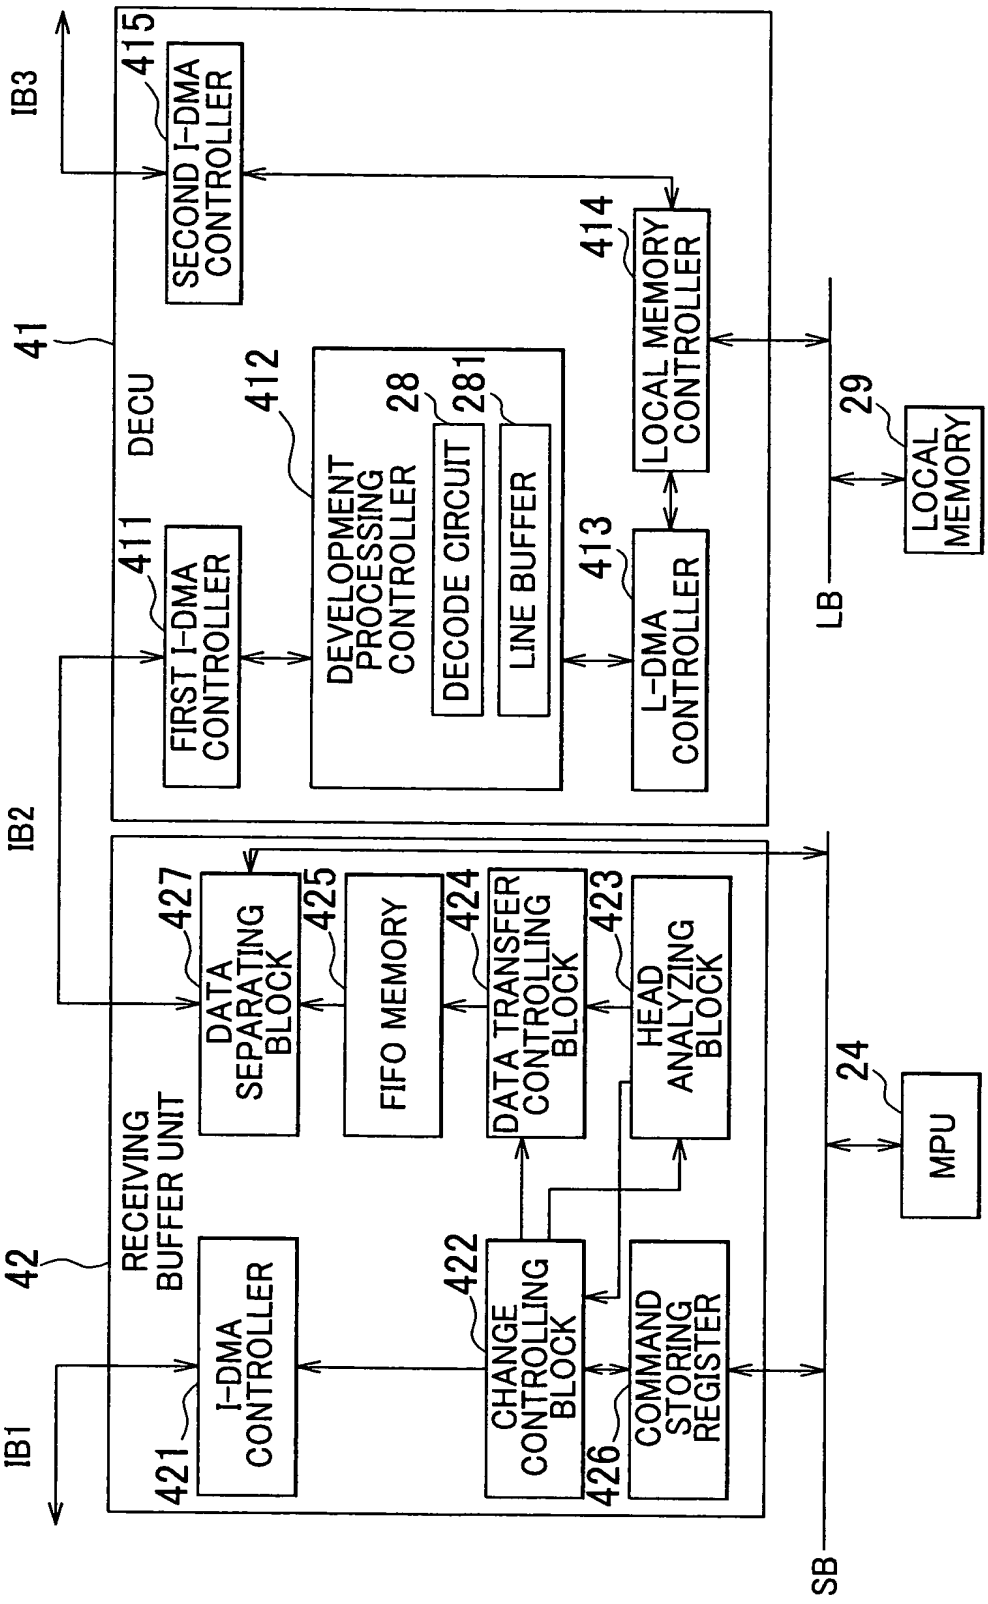

FIG. 7

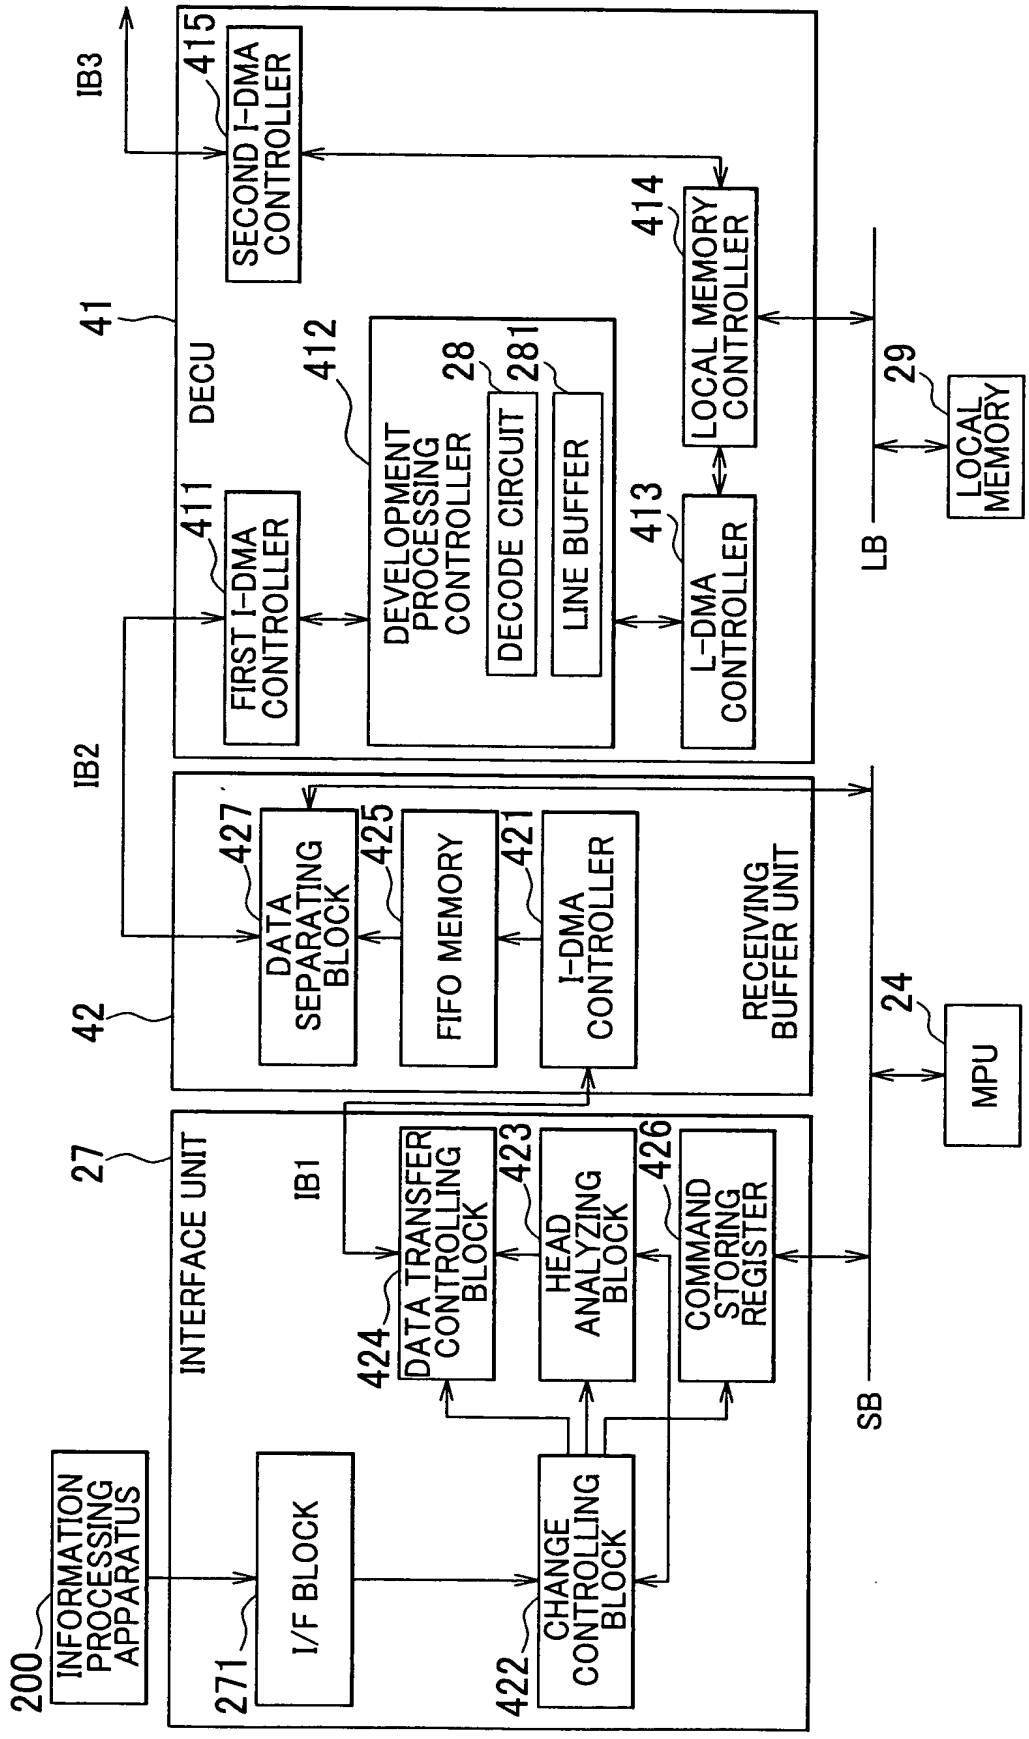

FIG. 8

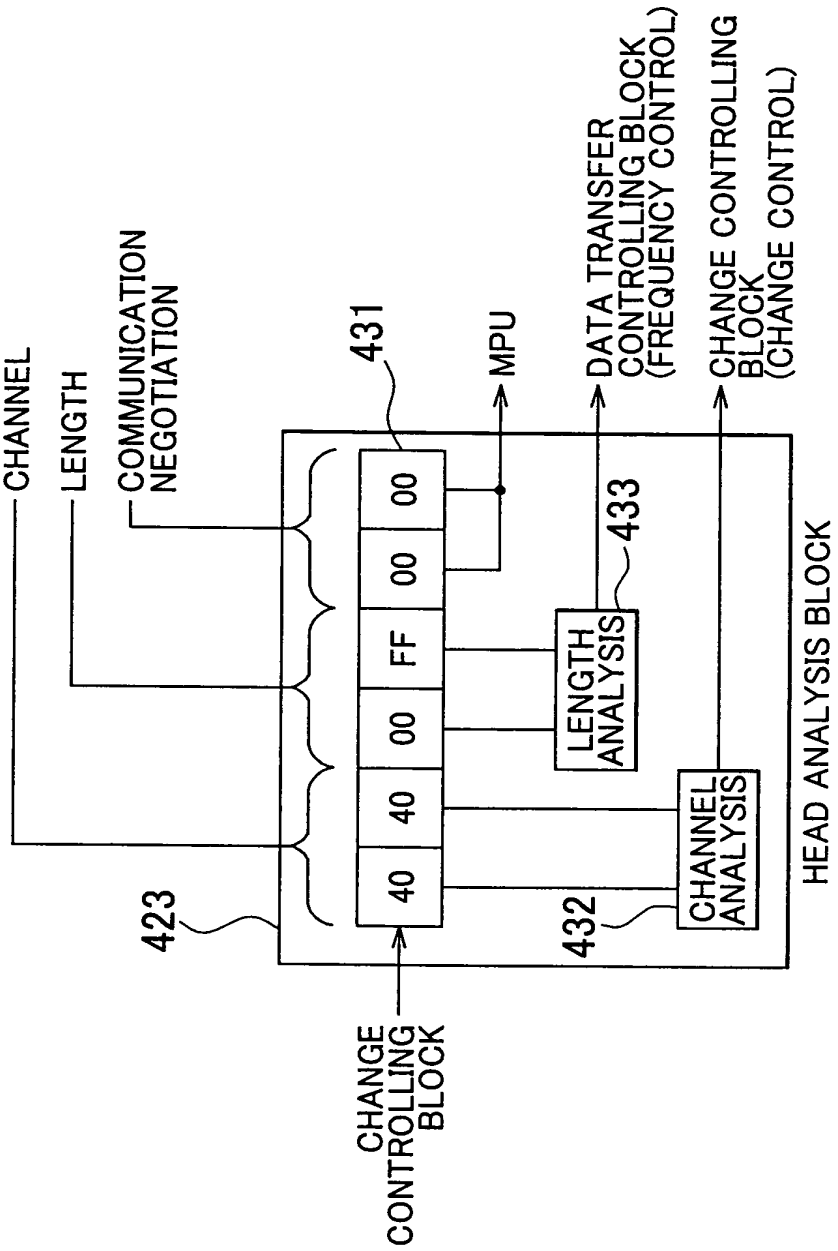

FIG. 9

OPERATION CONDITION
MAIN MEMORY SIDE : STARTING ADDRESS OF RUN LENGTH DATA IS AN EVEN ADDRESS
LOCAL MEMORY SIDE : STARTING ADDRESS OF IMAGE DATA IS AN EVEN ADDRESS
NUMBER OF BYTES IN 1 LINE : 16 BYTES

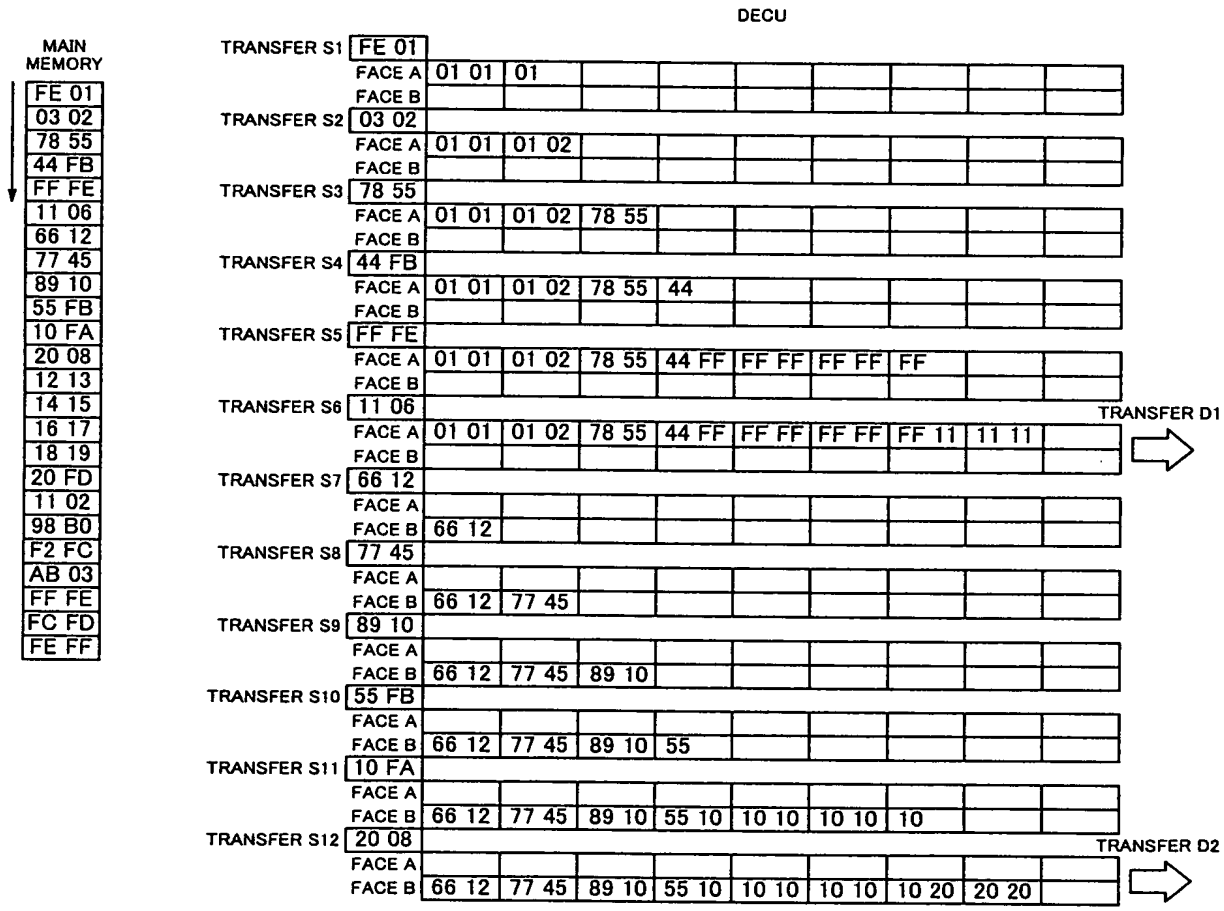

FIG. 10

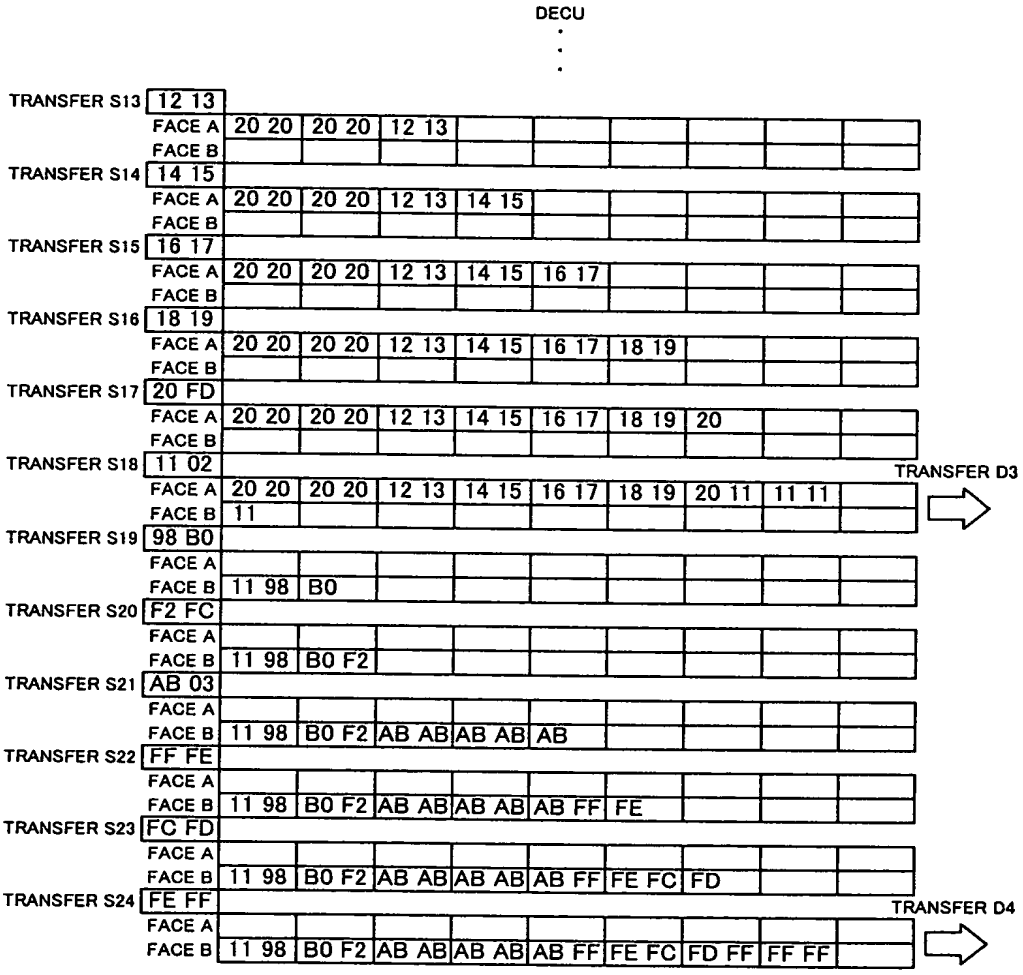

SETTING CONDITION
NO VERTICAL LINE REARRANGEMENT
TOTAL NUMBER OF DEVELOPED BYTES : 64 BYTES(16 × 4)
NUMBER OF BYTES IN 1 LINE : 16BYTES
NUMBER OF DEVELOPED LINES : 4 LINES

LOCAL MEMORY

FIG. 11A

D1—

01 01	01 02	78 55	44 FF
FF FF	FF FF	FF 11	11 11
00 00	00 00	00 00	00 00
00 00	00 00	00 00	00 00
00 00	00 00	00 00	00 00
00 00	00 00	00 00	00 00
00 00	00 00	00 00	00 00
00 00	00 00	00 00	00 00

FIG. 11B

D2—

01 01	01 02	78 55	44 FF
FF FF	FF FF	FF 11	11 11
62 12	77 45	89 10	55 10
10 10	10 10	10 20	20 20
00 00	00 00	00 00	00 00
00 00	00 00	00 00	00 00
00 00	00 00	00 00	00 00
00 00	00 00	00 00	00 00

FIG. 11C

D3—

01 01	01 02	78 55	44 FF
FF FF	FF FF	FF 11	11 11
62 12	77 45	89 10	55 10
10 10	10 10	10 20	20 20
20 20	20 20	12 13	14 15
16 17	18 19	20 11	11 11
00 00	00 00	00 00	00 00
00 00	00 00	00 00	00 00

FIG. 11D

D4—

01 01	01 02	78 55	44 FF
FF FF	FF FF	FF 11	11 11
62 12	77 45	89 10	55 10
10 10	10 10	10 20	20 20
20 20	20 20	12 13	14 15
16 17	18 19	20 11	11 11
11 98	B0 F2	AB AB	AB AB
AB FF	FE FC	FD FF	FF FF

FIG. 12